


# SN# 001445 Lamp Specific Acceptance Test



| Model: UV-3000, Magnum-GO              | Result | Steady State | Acceptable  | Units                     |
|----------------------------------------|--------|--------------|-------------|---------------------------|
| Peak Output Wavelength                 | Pass   | 368 -        | $365 \pm 5$ | nm                        |
| Full Width Half Maximum (FWHM)         | Pass   | 11 -         | $\leq 15$   | nm                        |
| Full Width at 10% Maximum              | Pass   | 22 -         | $\leq 30$   | nm                        |
| Longest Wavelength at Half Maximum     | Pass   | 374 -        | $\leq 377$  | nm                        |
| Max Excitation Irradiance (347-382 nm) | Pass   | 3608 -       | $\geq 2000$ | $\mu\text{W}/\text{cm}^2$ |

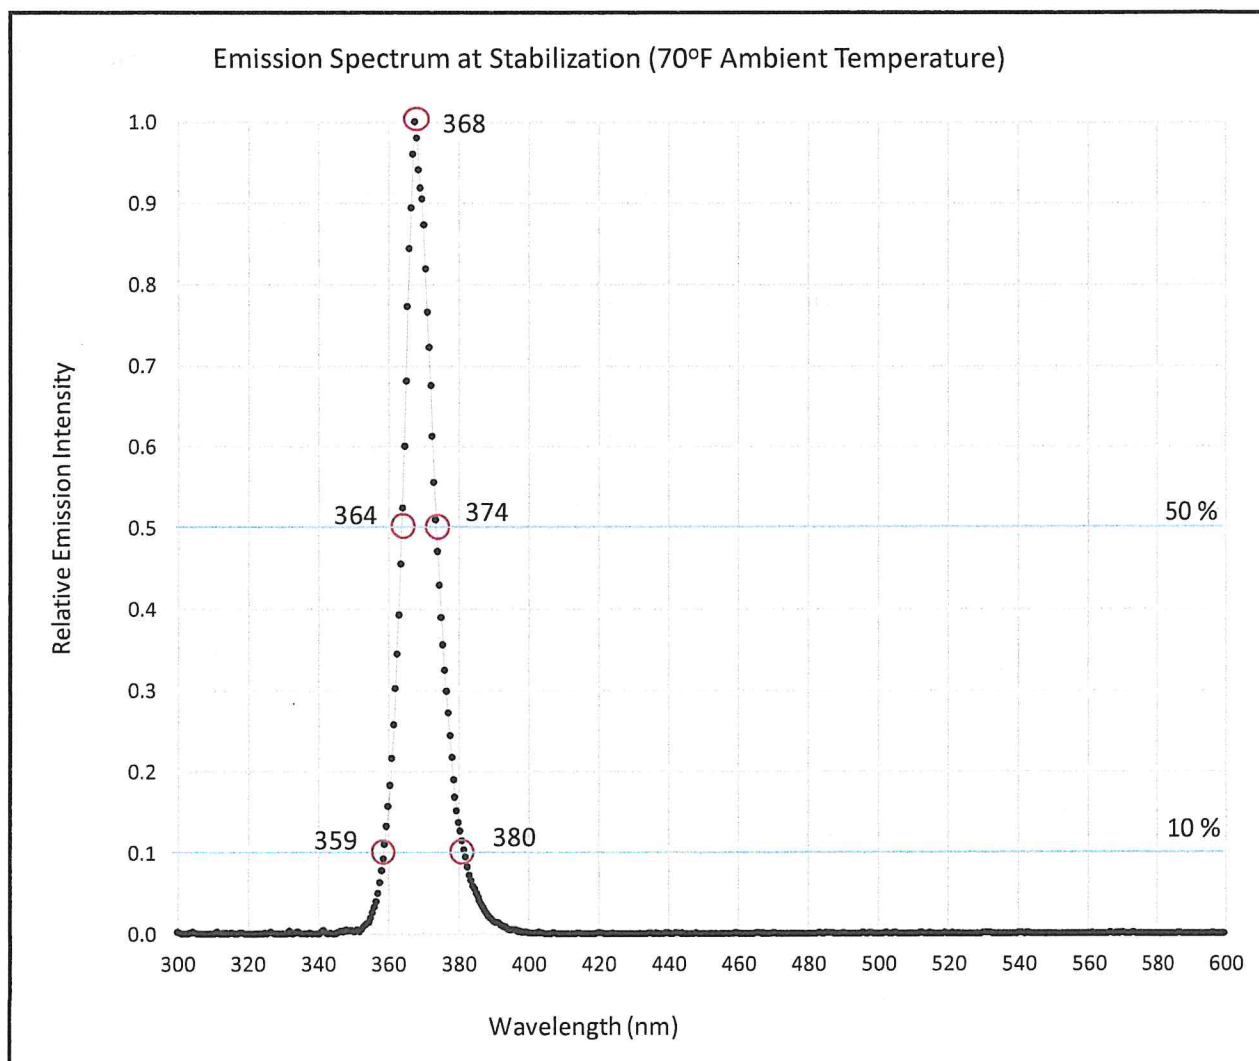

Inspector: REL IN MUK  
 Date of Certification: 05-28-2026

This lamp has been tested to conform to all requirements of:  
 ASTM E3022 ✓ AITM6-1001 ✓ ISO 3059 ✓ RRES 90061 ✓

Emission Spectrum Measured at Stabilization Temperature with Blue-wave UV-25 S/N 18120729, Certificate Number 18120729-UV-CR2-0925



## C4 Magnum Series, Certificate of Conformance



| SN# 001445                                                   | Switch On | Steady State | Elevated Temp* | Acceptable   | Units                     |
|--------------------------------------------------------------|-----------|--------------|----------------|--------------|---------------------------|
| Peak Output Wavelength                                       | 367       | 368          | 370            | $365 \pm 5$  | nm                        |
| Full Width Half Maximum (FWHM)                               | 11        | 11           | 13             | $\leq 15$    | nm                        |
| Full Width at 10% Maximum                                    | 22        | 22           | 27             | $\leq 30$    | nm                        |
| Longest Wavelength at Half Maximum                           | 373       | 374          | 376            | $\leq 377$   | nm                        |
| Visible Emission at 15 in                                    | 9         | 8            | 8              | $\leq 20$    | Lux                       |
| Visible Emission at 36 in                                    | 3         | 3            | 3              | $\leq 5$     | Lux                       |
| Irradiated Area at 15 in ( $>1000 \mu\text{W}/\text{cm}^2$ ) | 11        | 10           | 9              | $\geq 5$     | Inch Diameter             |
| Max Excitation Irradiance (347-382 nm)                       | 3,789     | 3,608        | 2,400          | $\geq 2,000$ | $\mu\text{W}/\text{cm}^2$ |
| Irradiance at Peak Output Wavelength                         | 334       | 318          | 185            | -            | $\mu\text{W}/\text{cm}^2$ |
| Min Working Distance** ( $< 5000 \mu\text{W}/\text{cm}^2$ )  | 14        | 12           | 11             | -            | Inches                    |
| Max Working Distance** ( $> 1200 \mu\text{W}/\text{cm}^2$ )  | 26        | 23           | 21             | -            | Inches                    |
| Body Stabilization Temp (70°F Ambient)                       | -         | 116          | -              | $\leq 120$   | °F                        |
| Current Ripple                                               | 9         | 9            | 9              | $\leq 35$    | mA peak-peak              |

\* Tested in a 110°F Environment, the maximum ambient temperature where light still meets all requirements

\*\* C4 Magnum series lights use a single LED emitter, thus beam uniformity does not change with working distance (RRES 90061)

